


3 LOCKING TABS  
SPACED AT 120°


6 mm - 20 DRILL  
& TAP THRU FOR  
GROUNDING LUG

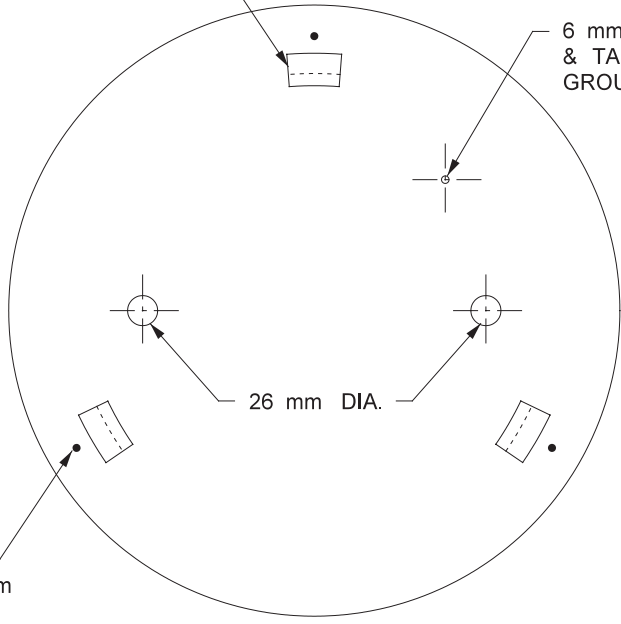

26 mm DIA.

HOLES COUNTER SUNK AT EACH  
OF 3 TABS FOR FOR 6 mm x 32 mm  
STAINLESS STEEL SELF-TAPPING  
SCREWS

PLAN VIEW

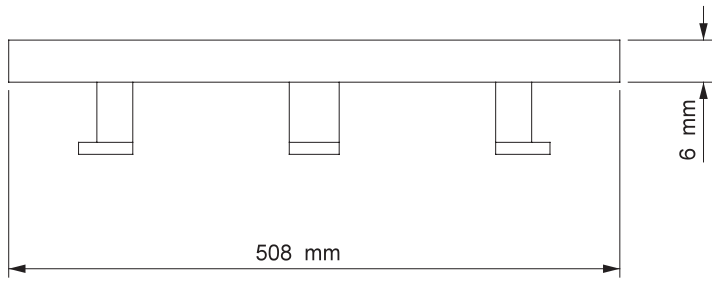

ELEVATION VIEW

GALVANIZING SPECIFICATION:  
  
ALL GALVANIZING SHALL BE HOT DIPPED  
WITH MINIMUM  
ZINC COATING OF 600g/sq.m. CSA G164-M92  
SPECIFICATION.

REVISIONS	BY	DATE	DESCRIPTION

**Manitoba  
Transportation and  
Government Services**  
NORTHERN AIRPORTS



**GALVANIZED STEEL  
PULPIT COVER**

APPROVED BY: \_\_\_\_\_

SCALE:	N.T.S.
DATE:	12/02
PREP. BY:	K.D.S.
<b>NAP-005</b>	