



PLAN VIEW 1:75

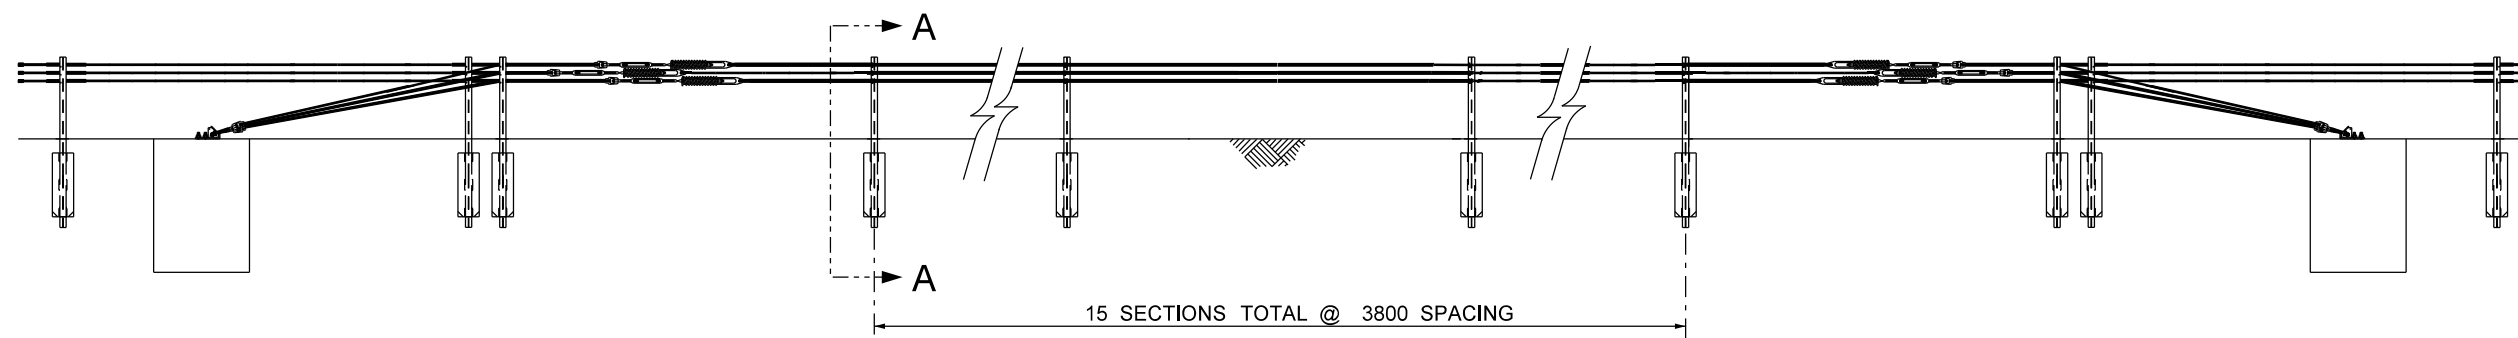

ELEVATION VIEW 1:75

NOTE: ALL SCALES ARE APPROXIMATE

REVISIONS		
DATE	DESCRIPTION	BY
07 2009	CONCRETE BASE OFFSET REVISED TO 300mm	DC


Manitoba 
**Infrastructure and
 Transportation**
 TRAFFIC ENGINEERING



**CABLE GUARDRAIL
 INTERMEDIATE ANCHOR**

SHEET NO	1 OF 3
DATE:	2002 - 09
DRAWN:	D.C.

TSEC02

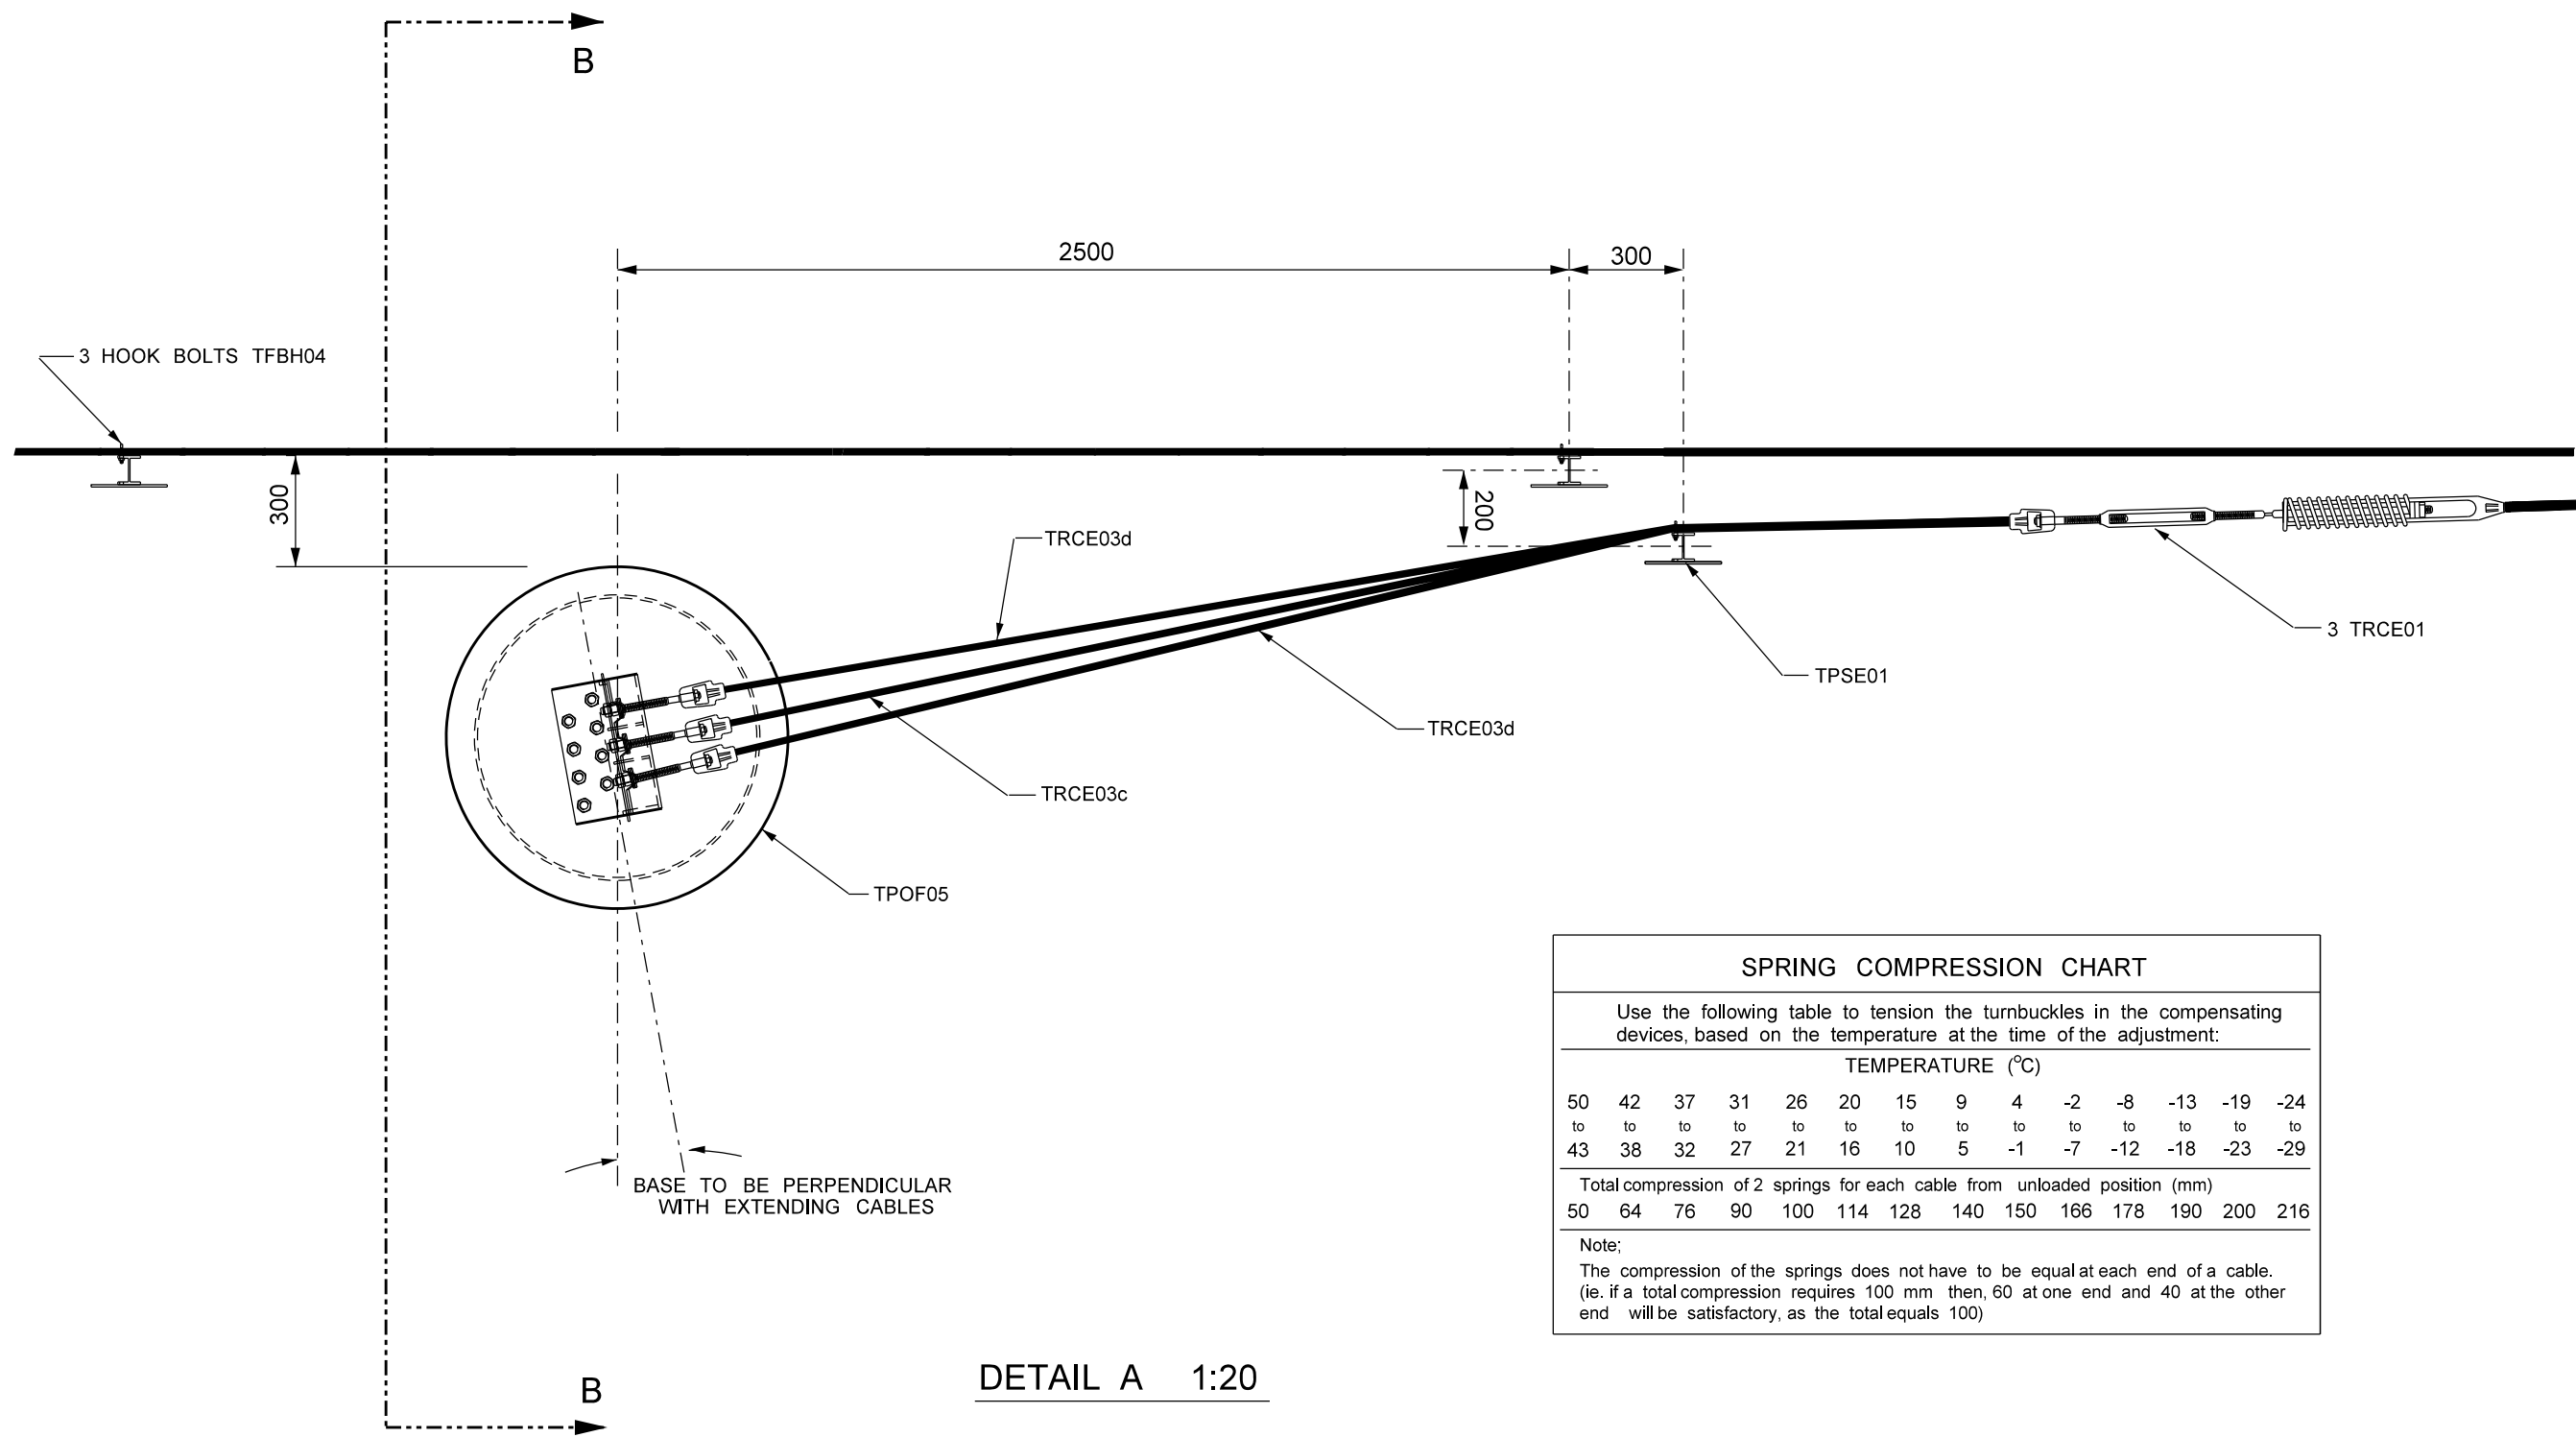

DETAIL A 1:20

SPRING COMPRESSION CHART

Use the following table to tension the turnbuckles in the compensating devices, based on the temperature at the time of the adjustment:

TEMPERATURE (°C)													
50	42	37	31	26	20	15	9	4	-2	-8	-13	-19	-24
to	to	to	to	to	to	to	to	to	to	to	to	to	to
43	38	32	27	21	16	10	5	-1	-7	-12	-18	-23	-29

Total compression of 2 springs for each cable from unloaded position (mm)													
50	64	76	90	100	114	128	140	150	166	178	190	200	216

Note:
The compression of the springs does not have to be equal at each end of a cable. (ie. if a total compression requires 100 mm then, 60 at one end and 40 at the other end will be satisfactory, as the total equals 100)

ALL SCALES ARE APPROXIMATE

REVISIONS		
DATE	DESCRIPTION	BY
07/2009	CONCRETE BASE OFFSET REVISED TO 300mm	DC


Manitoba Infrastructure and Transportation
TRAFFIC ENGINEERING




CABLE GUARDRAIL INTERMEDIATE ANCHOR

SHEET NO	2 OF 3
DATE:	2002 - 09
DRAWN:	D.C.

TSEC02

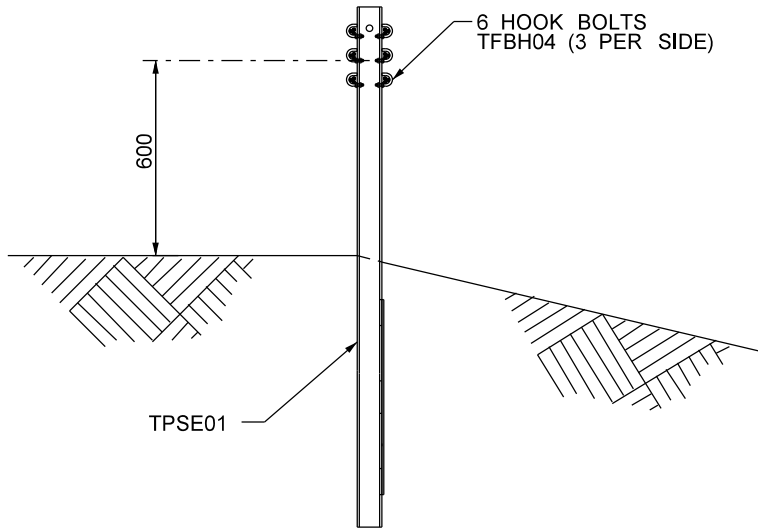

SECTION A-A 1:25

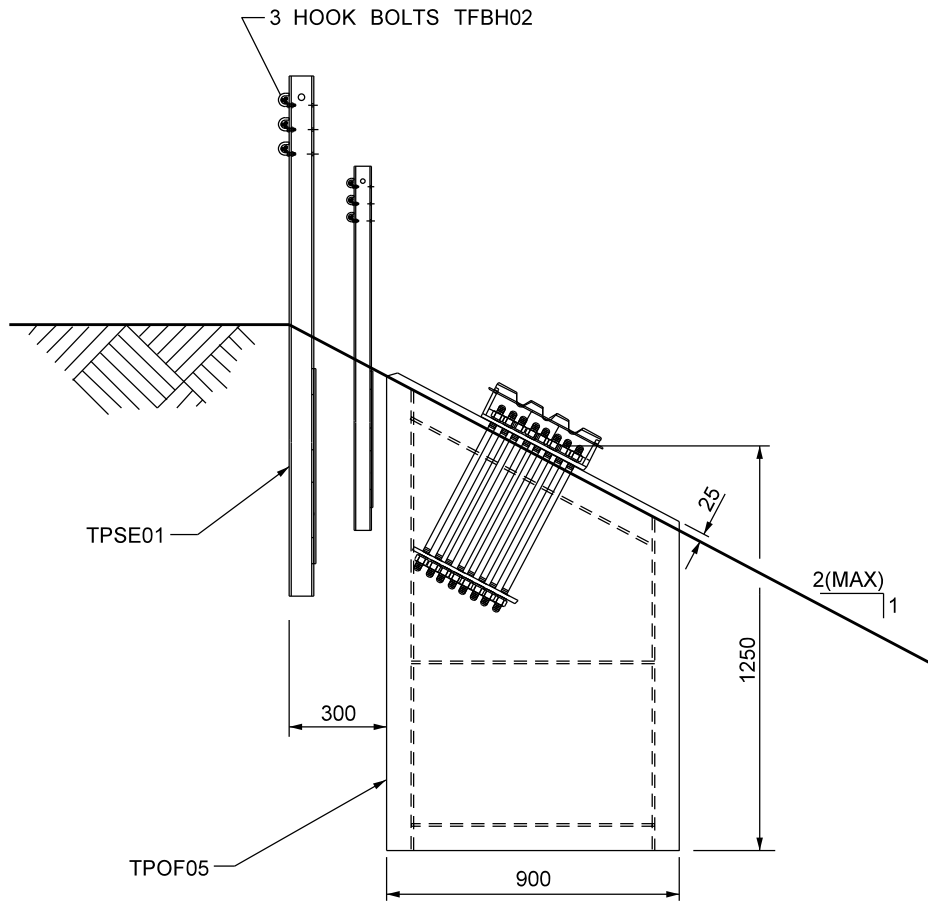

SECTION B-B 1:25

NOTES:
 1. DIMENSIONS ARE IN MILLIMETERS
 2. ALL SCALES ARE APPROXIMATE

REVISIONS		
DATE	DESCRIPTION	BY
07 2009	CONCRETE BASE OFFSET REVISED TO 300mm	DC

Manitoba 
**Infrastructure and
 Transportation**
 TRAFFIC ENGINEERING



CABLE GUARDRAIL
 INTERMEDIATE ANCHOR

SHEET NO	3 OF 3
DATE:	2002 - 09
DRAWN:	D.C.

TSEC02